

CRISTAL ECO LED Downlight Installation Guide

WARNING :



- THE LIGHT SOURCE OF THIS LUMINAIRE IS NOT REPLACEABLE;WHEN THE LIGHT SOURCE REACHES ITS END OF LIFE, THE WHOLE LUMINAIRE SHALL BE REPLACED.
- THE PRODUCT MUST BE INSTALLED BY QUALIFIED TECHNICIAN.
- THE POWER SUPPLY MUST BE TURNED OFF BEFORE INSTALLATION.
- NO WARRANTY WILL BE ACCEPTED IF THIS PRODUCT IS NOT INSTALLED BY A QUALIFIED ELECTRICIAN UNDER THE GUIDE.
- AC INPUT WIRE SPECIFICATIONS:3* (0.75-1.5) mm².



Product Specification


| Model | Size(mm) | Wattage | Voltage | Frequency | IP Class | Ta |
|---|----------|---------|------------|-----------|----------|------------|
| CODO-ECF-8-100FW CODO-ECS-8-100FW CODO-ECM-8-100FW | Φ119*76 | 8W | AC220-240V | 50/60Hz | IP20 | -10°C~40°C |
| CODO-ECF-10-100FW CODO-ECS-10-100FW CODO-ECM-10-100FW | Φ119*76 | 10W | | | | |
| CODO-ECF-10-150FW CODO-ECS-10-150FW CODO-ECM-10-150FW | Φ168x98 | 10W | | | | |
| CODO-ECF-18-150FW CODO-ECS-18-150FW CODO-ECM-18-150FW | Φ168x98 | 18W | | | | |
| CODO-ECF-18-200FW CODO-ECS-18-200FW CODO-ECM-18-200FW | Φ220x98 | 18W | | | | |
| CODO-ECF-24-200FW CODO-ECS-24-200FW CODO-ECM-24-200FW | Φ220x98 | 24W | | | | |
| CODO-ECF-33-200FW CODO-ECS-33-200FW CODO-ECM-33-200FW | Φ220x98 | 33W | | | | |

Installation of LED Downlight

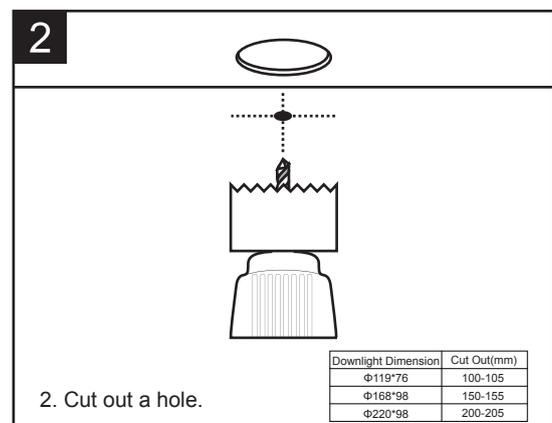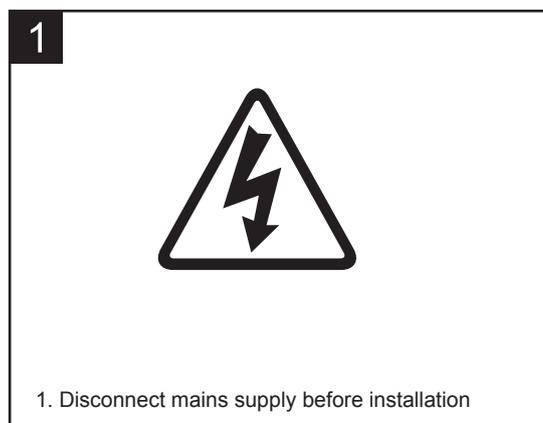


3

Press the button




4

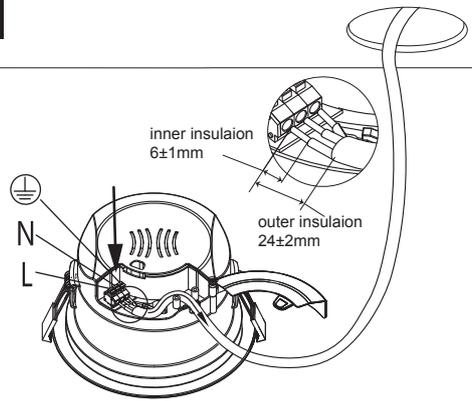


4. Individually connect the Live wire, Neutral wire and Ground wire of AC input wire to L/N and ground terminal of downlight and put the cord between the 2 pillars.

5

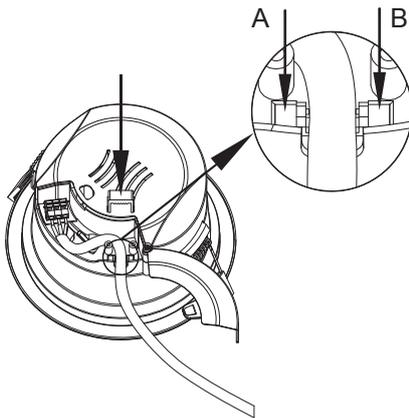


5. Press the clamp into the holes "A" and "B" to fix the cord.

6

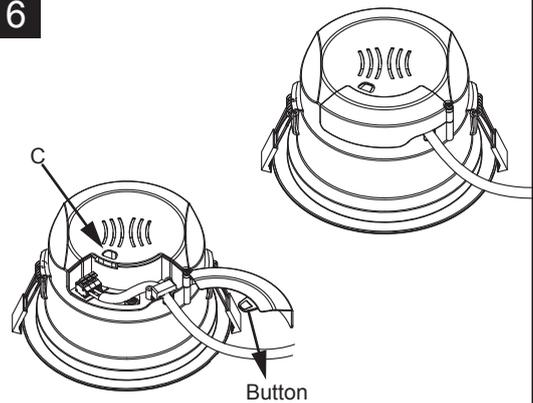


6. Rotate the cover back until the button fits into the hole "C" and make sure the cover could not open without pressing the button.

7

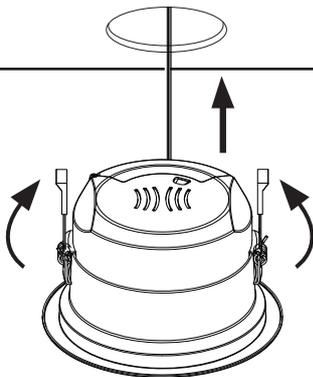


7. Push the spring up and place downlight in the ceiling.

8

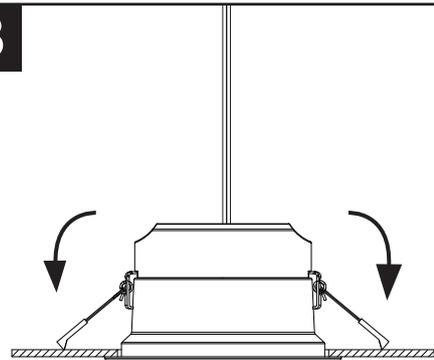

8. Release the spring and make sure the downlight is firmly in place.

9



9. Reconnect mains supply.

CEOTIS ECLAIRAGE
 C/O SOITEC
 Parc technologique des fontaines
 Chemin des Franques 38190
 Bernin France
 Email: contact@ceotis.fr
 TEL: +33 (0)476 92 97 70